



TG5000E TUB GRINDER

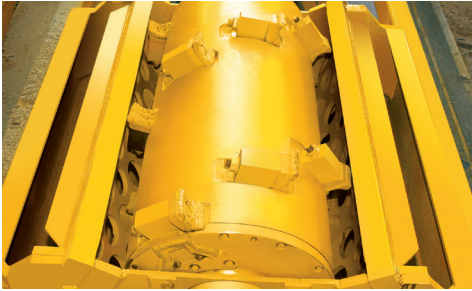

OPTIMAL CUTTING PERFORMANCE. The duplex drum offers proven cutting performance, and reversible hammers and tips nearly double the wear life of single-sided designs and simplify daily maintenance.

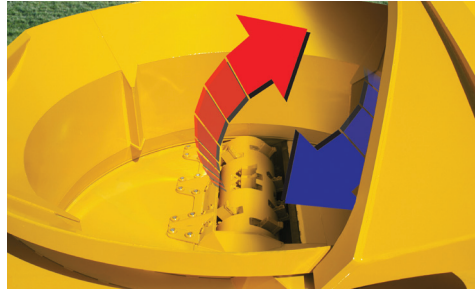

JOBSITE SAFETY. The patented thrown object restraint system (TORS) reduces the amount and distance of thrown objects, and has a smooth underside for better material flow.




CONVENIENT CONTROL. Monitor real-time performance and data via the on-rig display or remote control.



HIGH PRODUCTION. Designed to handle more production with less clogging, the 36" (91.4 cm) wide continuous undermill conveyor system offers optimum speed and capacity.



MOTOR CONTROL PANEL. The motor control panel provides options to configure a control system that best fits your application – whether that's a soft-start or VFD panel.

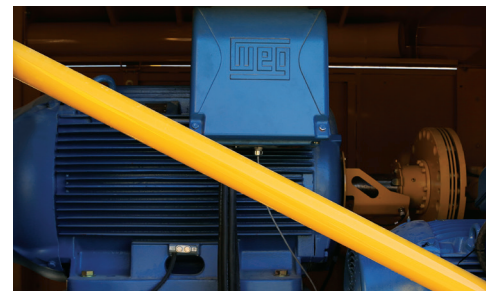

ELECTRIC MOTORS. Equipped with a 500 hp (373 kW) WEG totally enclosed fan-cooled electric motor to power the mill. A separate 60 hp (44.7 kW) electric motor powers the pump for the hydraulic circuits, while a 2 hp (1.5 kW) electric motor powers the fan to cool the hydraulic system.

TG5000E TUB GRINDER

GENERAL DIMENSIONS

Max transport length: 29.3' (8.9 m)

Max transport width: 8.4' (2.6 m)

Max transport height: 11.8' (3.6 m)

Weight: 45,500 lb (20,638.5 kg)

ELECTRIC MOTORS

Manufacturer: WEG W22

Fan motor horsepower: 2 hp (1.5 kW)

Hydraulic motor horsepower: 60 hp (44.7 kW)

Mill motor horsepower: 500 hp (373 kW)

Voltage: 380V/460V

Frequency: 50Hz/60Hz

Phase: 3

Enclosure: TEFC (totally enclosed, fan-cooled)

FEED SYSTEM

Inside diameter of tub: 8' (2.4 m)

Inside flare diameter (at tub opening): 12.3' (3.7 m)

Depth of tub: 5' (1.5 m)

DUPLEX DRUM OPTION

Millbox opening: 24" x 47" (61 cm x 119.4 cm)

Drum diameter: 22.5" (57.2 cm)

Number of hammers: 8

Number of tips: 16

SCREENS

Screen dimensions: 49.5" x 28.5" x 14.9" (126 cm x 72.4 cm x 37.8 cm)

Screen area: 2714 sq in (17,509.6 sq cm)

DISCHARGE SYSTEM – SINGLE BELT DESIGN

Belt length: 70.8' (21.6 m)

Belt width: 36" (91.4 cm)

Belt design: One-piece, V-cleat

HYDRAULIC SYSTEM

Tank capacity: 95 gal (359.6 L)

CONTROL PANEL OPTIONS

VFD (Variable Frequency Drive) panel: 380V or 460V, NEMA Type 5 enclosure

Soft-start starter panel: 380V or 460V, NEMA Type 4 enclosure

CONTROLS

Stationary: Analog hydraulic gauges, LCD display

Remote: Multifunction with built-in LCD display; max 300' (91.4 m) operating range

OPTIONS

Vermeer Confidence Plus® asset protection program

Bioscreen kit

Magnetic pulley

NOTES:

Vermeer Corporation reserves the right to make changes in engineering, design and specifications; add improvements; or discontinue manufacturing at any time without notice or obligation. Equipment shown is for illustrative purposes only and may display optional accessories or components. Please contact your local Vermeer dealer for more information on machine specifications. Vermeer, the Vermeer logo and Equipped to Do More are trademarks of Vermeer Manufacturing Company in the U.S. and/or other countries. WEG is a trademark of WEG S.A. © 2015 Vermeer Corporation. All Rights Reserved. Printed in the U.S.A. Please recycle.



EQUIPPED TO
DO MORE.